

Pressure Gauges / General Purpose Gauges / Pressure Gauges for Industry Gases / Nitrogen Pressure Gauges

CONSTRUCTIVE PROPERTIES


	STANDARD	OPTIONAL
Mounting Type	Bottom Connection	-
Scale Unit	bar/psi	bar psi kg/cm ²
Scale Range (PN)	0/16 0/25 0/40 0 - 315	
Case	Steel (Black Enamelled)	Plastic
Window	Polycarbonate	-
Movement	Brass	-
Wetted Parts	Copper Alloy	-
Connection	G 1/4" B	1/4" NPT
Dial	Aluminum	-
Pointer	Plastic	Aluminum
Welding	Soldering	Hard Soldering

**MG063DRM1-B/NO**

Bottom Connection

USAGE PROPERTIES

Fluid Temperature	Maximum + 60 °C	Maximum + 120 °C
Ambient Temperature	- 20 ... + 60 °C	-
Operating Pressure (max.)	Must not exceed %75' of full scale.	
Over Pressure Limit	≤40 bar PN x 1.25	>40 bar PN x 1.15
Accuracy Class	CL 2.5	CL 2.5
Protection Rate	IP 41	IP 41
Optimum Operating Range	Between 0,1 x PN and 0,75 x PN	
Storage Temperature	-40 ... +70 °C	-
Conformity	EN 837 - 1	-
Mechanical Shock Test Load	15g	-
Mechanical Vibration Test	10 Hz ile 150 Hz -1 oktav/dk. 2s / 3 eksende	

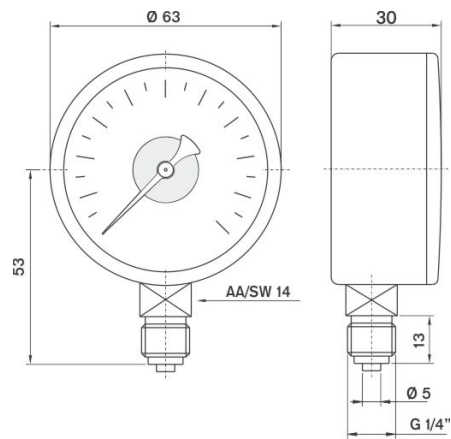

Model No: MG063DRM1-B..BA25G4L1/NO

Bottom Connection