


HVC-3/2-10 二位三通电磁换向阀

HVC-3/2-10 DIRECTIONAL VALVES
LINE MOUNTING


符号 SYMBOL




技术参数 Technical data

型号 Model	HVC-3/2-10
最大流量 (L/min) Max Flow rate (L/min)	80
最大工作压力 (Mpa) Max operating pressure (MPa)	21
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面磷化处理 / (casting) phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

特性曲线 (在使用 HLP46 , 油=40℃ ± 5℃时测得)
Characteristic curves (measured with HLP46, Voil=40℃ ± 5℃)

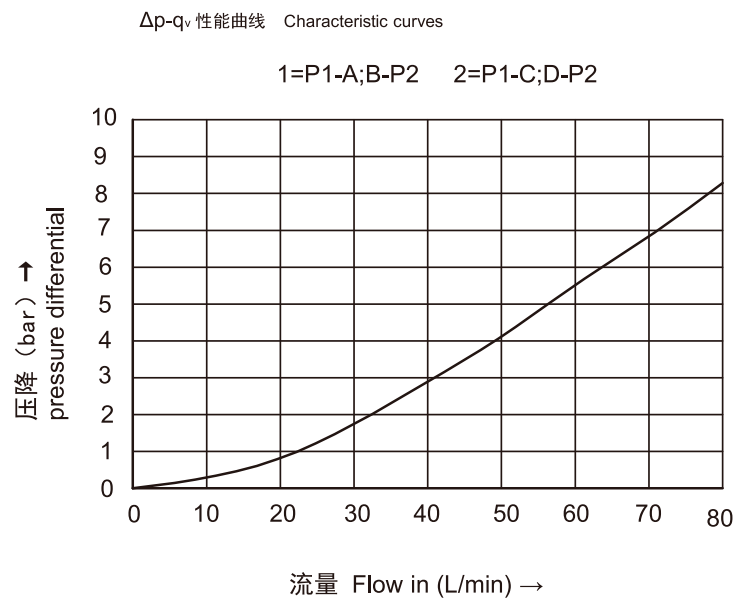

安装尺寸 Installation Dimensions

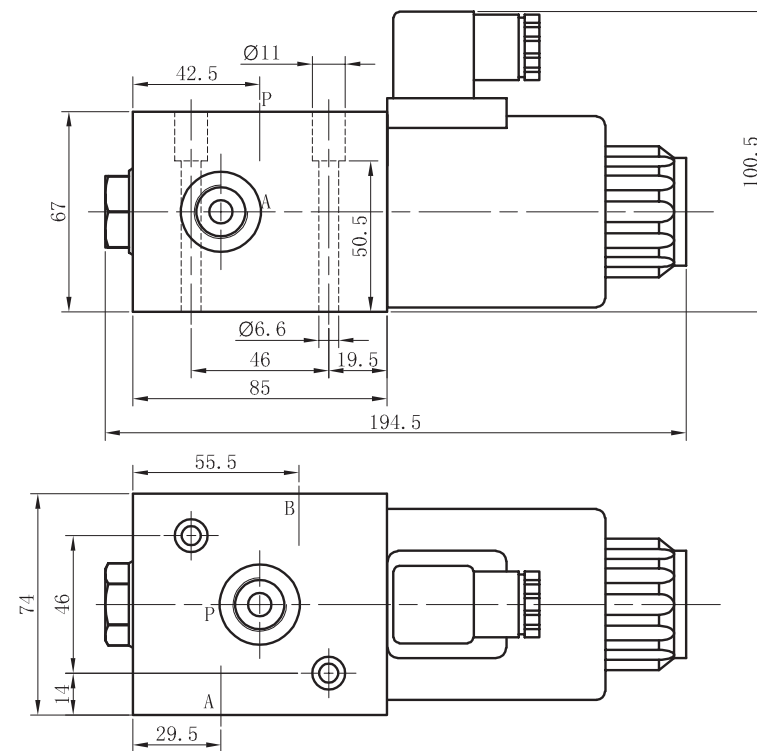

型号 Model	HVC-3/2-10	*	*	Z5L	*	附加说明 For further details
螺纹连接 Threaded connection G 3/8 G 1/2 SAE 8						
电压 Voltage DC12;DC24						
						Z5L=带灯大方形插头 Z5L=Large quadrate plug with light