


ZVH6 多回路选择阀

ZVH6 FLOW DIVERTERS



符号 SYMBOL

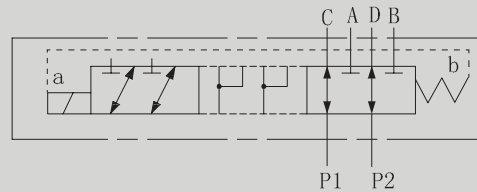

▶ 技术参数 Technical data


型号 Model	ZVH6
最大流量 (L/min) Max Flow rate (L/min)	50
最大工作压力 (Mpa) Max operating pressure (MPa)	21
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面磷化处理/ (casting) phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

▶ 特性曲线（在使用 HLP46， $\vartheta_{\text{油}}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 时测得）



Characteristic curves (measured with HLP46, $V_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

Δp - q_v 性能曲线 Characteristic curves

1=P1-A;B-P2 2=P1-C;D-P2

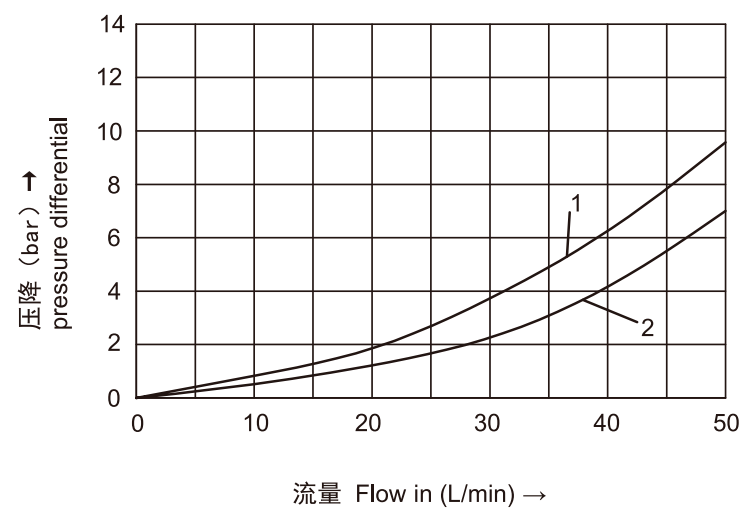

▶ 安装尺寸 Installation Dimensions

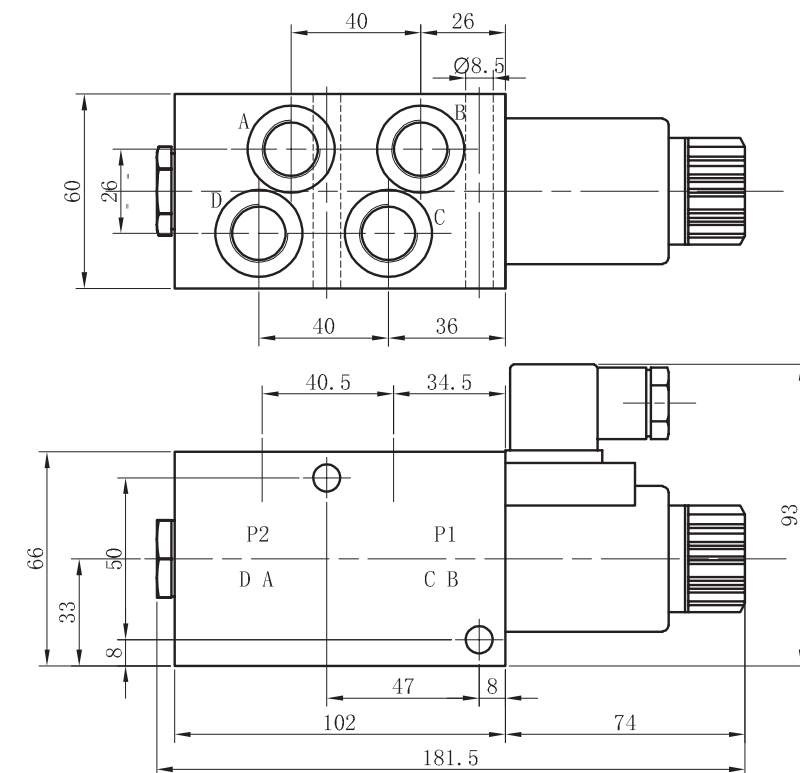

电压 Voltage DC12;DC24

N=有故障检查按钮;无=没有故障检查按钮

N=With concealed manual override

No Code=Without concealed manual override

Z5L=带灯大方形插头

Z5L=Large quadrate plug with light

特别要求单独列出
Special requirements to
be briefly specified

螺纹连接 Threaded connection
G 3/8